


Drain-up hose LIGHT II

for packaged air conditioners.


Features

1. Less connection

- Less risky for leakage
- Less working time

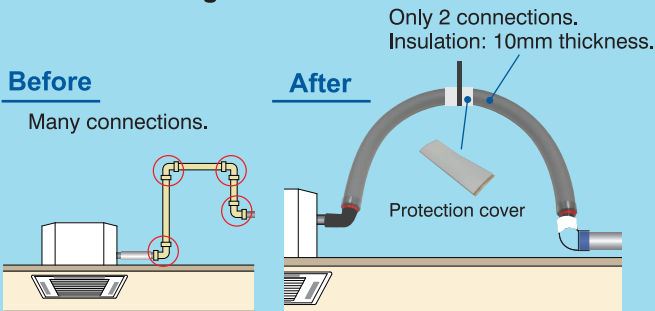


2. Can be connected with PVC pipes directly

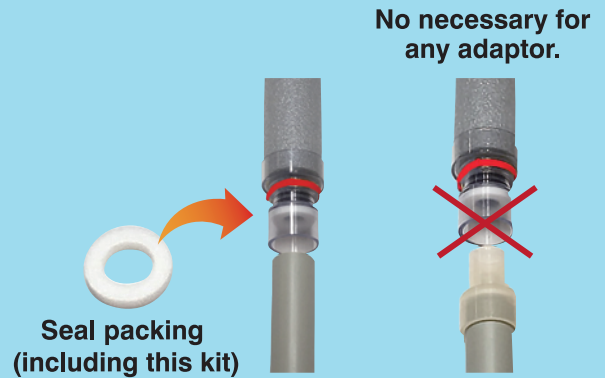

3. Can be connected with fittings directly


Straight pipe:
Insert inside

Elbow: Insert outside
(= one side bigger OD).

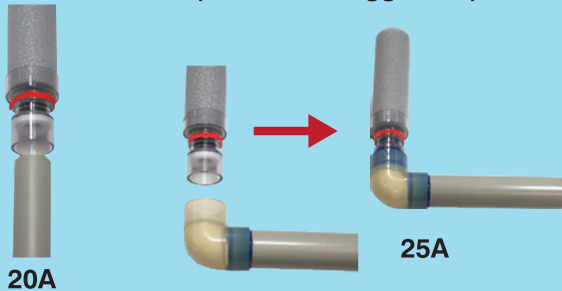

4. Detachable & Rotatable fitting

- Easy maintenance
- Easy check if properly inserted

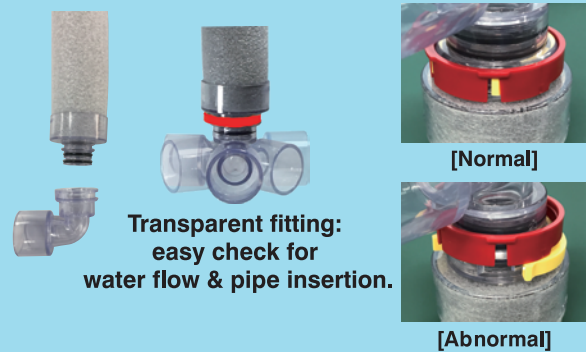


5. With insulation for fittings on both sides



6. Soft PVC type is available

Adjustable even if slightly larger pipes.

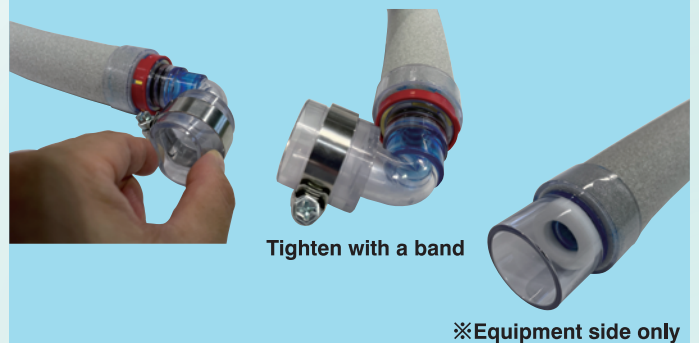

Construction example




Product lineup

| Article number | Equipment side | | Drainage pipe side | | Length (mm) | Quantity per case carton |
|------------------|----------------|----------------------|--------------------|----------------------|-------------|--------------------------|
| | Type | Available size (=ID) | Type | Available size (=ID) | | |
| DRL2-20L25S-1000 | Elbow | VP20 | Straight | VP25/ | 1000 | 20set |
| DRL2-20L25S-700 | | | | | 700 | |
| DRL2-25L25S-1000 | | VP25 | | | 1000 | |
| DRL2-25L25S-700 | | | | | 700 | |
| DRL2-20L25L-1000 | | Elbow | VP20 | | 1000 | |
| DRL2-20L25L-700 | | | | | 700 | |
| DRL2-25L25L-1000 | | | VP25 | | 1000 | |
| DRL2-25L25L-700 | | | | | 700 | |

Contents

- ① Hose with insulation & fittings for both sides: 1pcs
- ② Insulation for fittings: 2pcs
- ③ Seal packing: 1pcs
- ④ Protect sheet: 1pcs
- ⑤ Instruction manual: 1pcs

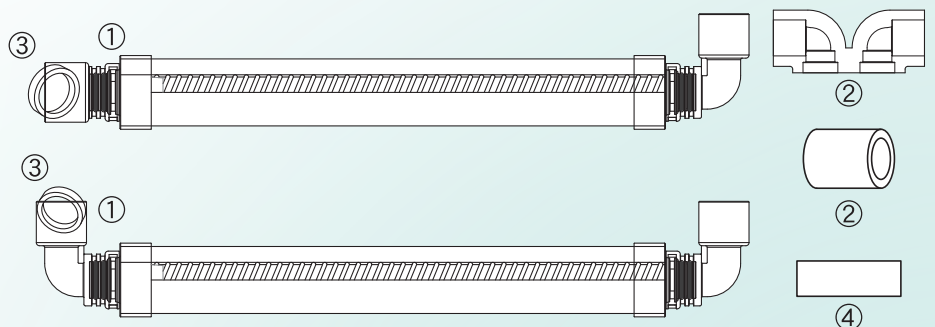

INOAC Housing & Construction Materials Co., LTD.

INOAC Hibino Bldg, 2F, 4-9-27 Taihou, Atsuta-ku, Nagoya Japan 456-0062

Makoto Sato(Mr.)/Overseas Department

Tel :(+81) 50-3135-8700

Mail:makoto.sato@inoac.co.jp

URL:https://www.inoac-juukan.co.jp/en/

